


Florigo Counterrange

UPDATED 11-10-07

THIS IS A CONCEPT-DRAWING – NOT TO SCALE –
Unless expressly stated this drawing shall not be binding as to detail.

NOMINAL LOADS	
GAS:	52.8 kW 179,000B.Th.U
ELECTRICITY 400V:	3.8 kW
ELECTRICITY 230V:	7.3 kW
DUCTING SIZE:	ø315
FAN:	CNA 400 RD 4000 m ³ /h
COLOR SPECIFICATIONS	
FRIER-SIDE (RAL-NO):	
CUST.-SIDE TOP(PRINT):	
CUST.-SIDE BTM (" "):	
SPECIALS	
Filtration system	
Halogens + ceramics	
Waste oil dump top	
Fan delay timer	

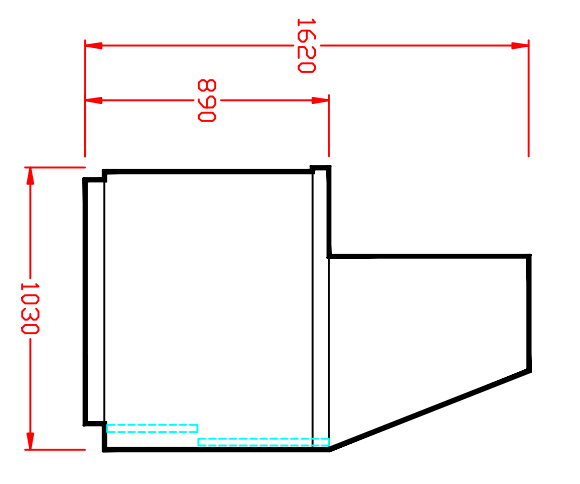

Safety cut-out on all pans	
Separate return pipes	
Minimum oil level indicators	
2 extra baskets	
Mirror glass doors	
Lid for scrap box	
Plate for bottom chip pan	

CODERING	OMSCHRIJVING
3	
2	
1	
WZ.	DAT.

POS. / AANT.	BENAMING	MAT.	OPMERKING
SCHAAL:	DATUM: 25-07-07	AMPROL.	GET. J. van den End
5 Units Florigo Counterrange Electronic Ignition			
 FLORIGO <small>FRITING SOLUTIONS</small>			FLORIGO UK LIMITED REDDITCH B98 9PB TEL. 01527 592000 FAX. 01527 585626
TEKENING NR.:			0716444-W4
WUZ.			